

This article was published in an Elsevier journal. The attached copy is furnished to the author for non-commercial research and education use, including for instruction at the author's institution, sharing with colleagues and providing to institution administration.

Other uses, including reproduction and distribution, or selling or licensing copies, or posting to personal, institutional or third party websites are prohibited.

In most cases authors are permitted to post their version of the article (e.g. in Word or Tex form) to their personal website or institutional repository. Authors requiring further information regarding Elsevier's archiving and manuscript policies are encouraged to visit:

<http://www.elsevier.com/copyright>

available at [www.sciencedirect.com](http://www.sciencedirect.com)journal homepage: [www.elsevier.com/locate/compag](http://www.elsevier.com/locate/compag)

## Short communication

# Tractor PT: A traction prediction software for agricultural tractors

Heliodoro Catalán<sup>a</sup>, Pilar Linares<sup>b</sup>, Valeriano Méndez<sup>a,\*</sup>

<sup>a</sup> Dpto. Matemática Aplicada, E.T.S. Ingenieros Agrónomos, Universidad Politécnica de Madrid, Ciudad Universitaria s/n, 28040 Madrid, Spain

<sup>b</sup> Dpto. Ingeniería Rural, E.T.S. Ingenieros Agrónomos, Universidad Politécnica de Madrid, Ciudad Universitaria s/n, 28040 Madrid, Spain

## ARTICLE INFO

### Article history:

Received 15 January 2007

Received in revised form

30 July 2007

Accepted 30 July 2007

### Keywords:

Traction prediction

Tractor performance

Simulation

Visual programming

## ABSTRACT

Traction prediction modelling, a key factor in farm tractor design, has been driven by the need to find the answer to this question without having to build physical prototypes. A wide range of theories and their respective algorithms can be used in such predictions.

The “Tractors and Tillage” research team at the Polytechnic University of Madrid, which engages, among others, in traction prediction for farm tractors, has developed a series of programs based on the cone index as the parameter representative of the terrain. With the software introduced in the present paper, written in Visual Basic, slip can be predicted in two- and four-wheel drive tractors using any one of four models. It includes databases for tractors, front tyres, rear tyres and working conditions (soil cone index and drawbar pull exerted). The results can be exported in spreadsheet format.

© 2007 Published by Elsevier B.V.

## 1. Introduction

Computerized tractor simulation and prediction models, which economize on time and field trials, constitute an essentially cost-free approach to the determination of the relative importance of a number of factors affecting actual tractor operation. Gradually but steadily rising energy prices oblige engineers and users to improve tractor operation by comparing and analyzing the various parameters involved. Tractor performance on actual soil conditions differs substantially from the results of laboratory track testing. The physical laws governing movement and behaviour in general vary from one surface to the other, while constant changes in terrain and drawbar pull generate ongoing variations in the dynamic load on each wheel.

The soil–vehicle interface is the primary cause of low traction efficiency (estimated to be on the order of 60% on farmland, for transmission performance of nearly 90%). In 1935 the National Tillage Machinery Laboratory at Auburn, Alabama, was created (Bekker, 1969). The soil bins built there to test farm implements soon proved to be a valuable tool for analyzing soil response to the mechanical stress caused by ploughing vehicles and implements. The Vicksburg, Mississippi Waterways Experiment Station (WES) was designated to launch a trafficability programme in 1945. In the 1950s, a host of papers dealing with vehicle behaviour on natural terrain appeared, scattered across a variety of journals (Upadhyaya et al., 1997). Bekker's studies on the occasion of the NASA moon flight programmes fathered TERRAMECHANICS. Many surveys have been based on strain–deformation relations at

\* Corresponding author. Tel.: +34 913 365 854; fax: +34 913 365 845.

E-mail addresses: [h.catalan@upm.es](mailto:h.catalan@upm.es) (H. Catalán), [pilar.linares@upm.es](mailto:pilar.linares@upm.es) (P. Linares), [valeriano.mendez@upm.es](mailto:valeriano.mendez@upm.es) (V. Méndez).  
0168-1699/\$ – see front matter © 2007 Published by Elsevier B.V.  
doi:10.1016/j.compag.2007.07.009

the soil–vehicle interface, such as the Nepean Tracked Vehicle Performance Model (NTVPM) (Wong, 1986).

Deere & Co. implemented a vast experimental programme to analyze the conditions defining maximum traction performance in farm tractors, using the cone index as the sole parameter to represent the terrain. A series of associated parameters were likewise employed, such as wheel number (Wismer and Luth, 1972) and mobility number (Brixius and Wismer, 1975). In England, the National Institute of Agricultural Engineering (NIAE, Silsoe) studied the traction capacity of farm tyres using vehicles such as the single wheel tester and developed a theory likewise based on the cone index (Gee-Clough et al., 1978; Gee-Clough, 1984).

Computer models or simulation software to predict tractor response contribute to determining the relative importance of different factors that affect soil–tractor behaviour without the need for costly and time-consuming field trials. Moreover, this software helps researchers and tractor manufacturers to improve performance. Al-Hamed et al. (1994) introduced a spreadsheet to calculate tractive efficiency in radial wheels. Subsequently used by authors such as Grisso and Zoz (2004), Zoz and Grisso (2003) and Goering and Hansen (2004), it has gradually evolved into a system that covers the entire tractor. Simulation software to predict tractor performance may draw from different programming tools. Presently Visual Basic and Visual C++ are widely used to develop such software. The Visual Basic environment facilitates user access to and implementation of program functionalities. Al-Hamed and Al-Janobi (2001) developed prediction software that calculates drawbar pull and slip from engine power and theoretical forward speed.

The “Tractors and Tillage” research team at the Polytechnic University of Madrid, which engages, among others, in traction prediction for farm tractors, has developed a series of programs based on the cone index as the parameter representative of the terrain. With the software introduced in the present paper, written in Visual Basic, slip can be predicted in two- and four-wheel drive tractors using any one of four models. It includes databases for tractors, front tyres, rear tyres and working conditions (soil cone index and drawbar pull exerted). The results can be exported in spreadsheet format.

## 2. Traction prediction models

Fig. 1 represents the general outline for traction prediction models. The input data refer to the vehicle, terrain and working conditions (drawbar pull exerted).

The models used yield an exponential equation that relates traction coefficient and slip as follows:

$$\mu = \mu_{\max}(1 - e^{-\alpha\delta})$$

where  $\delta$  is slip,  $\alpha$  is a parameter that characterizes the soil–vehicle system,  $\mu$  is the traction coefficient ( $\mu_{\max}$  is the maximum traction coefficient).

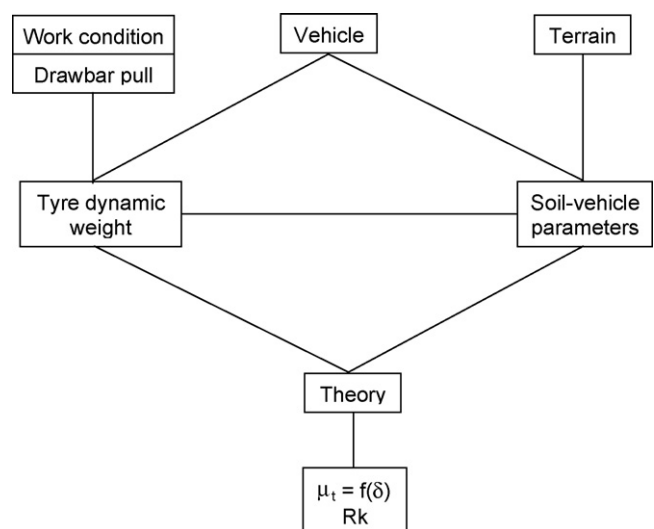


Fig. 1 – Traction prediction theory flow diagram.

## 3. Models used

As a difference with other prediction software programs, Tractor.PT deploys the four prediction models characterized in Table 1, all of which use the cone index to represent soil conditions. The first three are well known: the ASAE or Cn (Wismer and Luth, 1972); Deere or Bn (Brixius and Wismer, 1975); and NIAE or MN (Gee-Clough, 1984) models. The fourth, the modified Cn (ASAE) model, was developed by the Polytechnic University of Madrid's Rural Engineering Department based on years of comparative studies of predicted and experimental testing.

Program output consists of two- and four-wheel drive tractor slip values for the four prediction theories. For greater convenience, the software is provided in Spanish, Portuguese, English or French. Before predictions can be processed, the input values must be entered into four databases: tractor, test conditions (cone index and drawbar pull exerted), rear tyres and front tyres.


The primary difference between this software and the Grisso-Zoz Goering spreadsheet and Al-Hamed and Al-Janobi program lies in the input data. Tractor.PT uses drawbar pull rather than engine horsepower.

## 4. Modified ASAE model

The Madrid School of Agricultural Engineering's Rural Engineering Department has engaged in terramechanics research (or land locomotion) since 1970. Linares et al. (1993), testing tractors under actual field conditions based on electronic instrumentation able to record test variables *in situ* (Camps et al., 2000a; Catalán and Linares, 1998). With these facilities, comparisons could be drawn between prediction and experimentation, applying cone index-based theories.

In these surveys, predictions were made on a LOTUS spreadsheet. When the Cn theory was used, the comparison revealed deviations: the theory proved to be pessimistic for soft soils (with higher predicted than experimental figures)

Table 1 – Prediction models used in the Tractor\_PT program

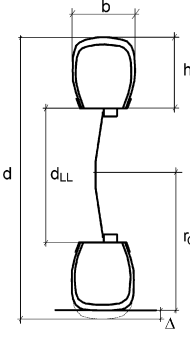Model	S-V parameter	Rolling resistance coefficient, k	Gross thrust coefficient, $\mu_t$
Cn	Wheel number $C_n = \frac{CI \cdot b \cdot d}{P_r}$	$k = \frac{1,2}{C_n} + 0,04$	$\mu_t = 0,75 \cdot (1 - e^{-0,3 \cdot C_n \cdot \delta})$
Bn	Mobility Number $B_n = C_n \cdot \frac{1 + 5 \cdot \frac{\Delta}{h}}{1 + 3 \cdot \frac{b}{d}}$	$k = \frac{1}{B_n} + 0,04 + \frac{0,5 \cdot \delta}{\sqrt{B_n}}$	$\mu_t = 0,88 \cdot (1 - e^{-0,1 \cdot B_n}) \cdot (1 - e^{-7,5 \cdot \delta}) + 0,04$
MN	Mobility number $MN = C_n \cdot \sqrt{\frac{\Delta}{h}} \cdot \frac{1}{1 + \frac{b}{2 \cdot d}}$	$k = 0,049 + \frac{0,289}{MN}$	$\mu_t = \mu_n + k$ $\mu_n = \mu_{n\max} \cdot (1 - e^{-k' \cdot \delta})$ $\begin{cases} \mu_{n\max} = 0,796 - \frac{0,92}{MN} \\ k' \cdot \mu_{n\max} = 4,838 + 0,061 \cdot MN \end{cases}$
Modified Cn	$C_n = \frac{CI \cdot b \cdot d}{P_r}$	$k = \frac{1,2}{C_n} + 0,04$	$\mu_t = 0,75 \cdot (1 - e^{A1 \cdot Cn \cdot \delta})$ Theoretical radii : $A1^* = \frac{253}{CI^{1,09}}$ Experimental radii : $A1 = \frac{182}{CI^{1,0231}}$
Pr → tyre weight b → section width d → overall diameter δ → slip $\begin{cases} \Delta = \left( \frac{d}{2} - r_c \right) \cdot \frac{P_r}{P_{r\max}} \\ h = \frac{d - d_{LL}}{2} \end{cases}$			b → tyre section width d → overall diameter Δ → tyre deflection h → tyre section height d <sub>LL</sub> → rim diameter r <sub>c</sub> → static loaded radius (with max. load per wheel on hard soil) P <sub>rmax</sub> → maximum tyre load P <sub>r</sub> → tyre load CI → Cone Index (kPa)

and optimistic for hard soils. An adjustment between prediction and experiment was made, maintaining the original equation that related traction coefficient  $\mu_t$  to slip  $\delta$ :

$$\mu_t = 0,75(1 - e^{A1Cn\delta})$$

In the original model A1, the value was 0.3. For the adjustment, Cervantes (1993) proposed 0.16 for hard soil and 0.61 for soft soil.

Further comparisons were made with four-wheel drive tractors on hard and soft soil. DOS software titled TRACCIÓN (Catalán, 1996) was used to calculate the predictions. The pattern found was the same as in the two-wheel drive tests and the fit between the experimental and predicted results was improved by changing the parameters.

This consistency in the results obtained prompted the initiation of a study that attempted to expand the range of soils tested from 200 to 1200 kPa, although for theory Cn and two-wheel drive vehicles only (Hernández, 1998). In light of the results of that study, a change was proposed in the slip coefficient in the original Cn theory, to be replaced by slip-dependent parameter A1 (Table 2). This led to a substantial improvement in the comparison between predicted

and experimental findings. In this case, prediction was conducted with an Excel spreadsheet, using the radii measured in the experimental trials (Cervantes et al., 2000). The same operating procedure was deployed in subsequent years, using “catalogue” radii for the prediction (Catalán and Linares, 1998; Camps et al., 2000b) obtaining the A1\* parameter (Table 2). The software developed for this purpose, written in C++, was named MITRA (Spanish acronym for farm tractor modelling software) (Camps et al., 2005).

The problems encountered to export the results obtained with MITRA software hindered its dissemination, however. A stage in which the effect of tyre weight and width on tractor performance was studied with a Mathcad spreadsheet (Mahl

Table 2 – Parameter A1 used in modified Cn model

Radii	Parameter
Measured in experimental tests	$A1 = \frac{182}{CI^{1,0231}}$
Theoretical (catalogue)	$A1^* = \frac{253}{CI^{1,09}}$

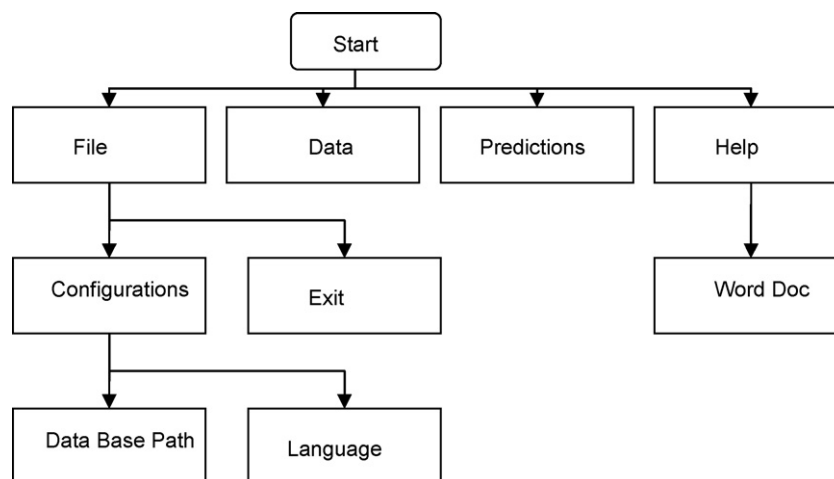


Fig. 2 – Tractor.PT program structure.

et al., 2005; Linares et al., 2005) was followed by the development of new prediction software, Tractor.PT (Linares et al., 2006).

## 5. Tractor.PT program structure

Object-oriented programming is flexible and easy to use. For this reason, the program for predicting traction in 2WD and 4WD tractors on farm land was developed in Visual Basic 6.0. TRACTOR.PT has a Windows graphic user inter-

face (GUI) developed in Visual Basic, Access to store the data model and Excel as interface to print form and to export data. It runs on computers with Windows 98/NT/2000 or XP operating systems and Microsoft Office Access, Word and Excel. The program has two Access data base files, one to store the parameters depending on the language selected. All the fixed text is stored in this database, the windows labels, the pop-up message texts, the Excel form texts, and the dropdown list options. The program can manage four languages (English, French, Portuguese and Spanish), but languages can be added to the database without modifying

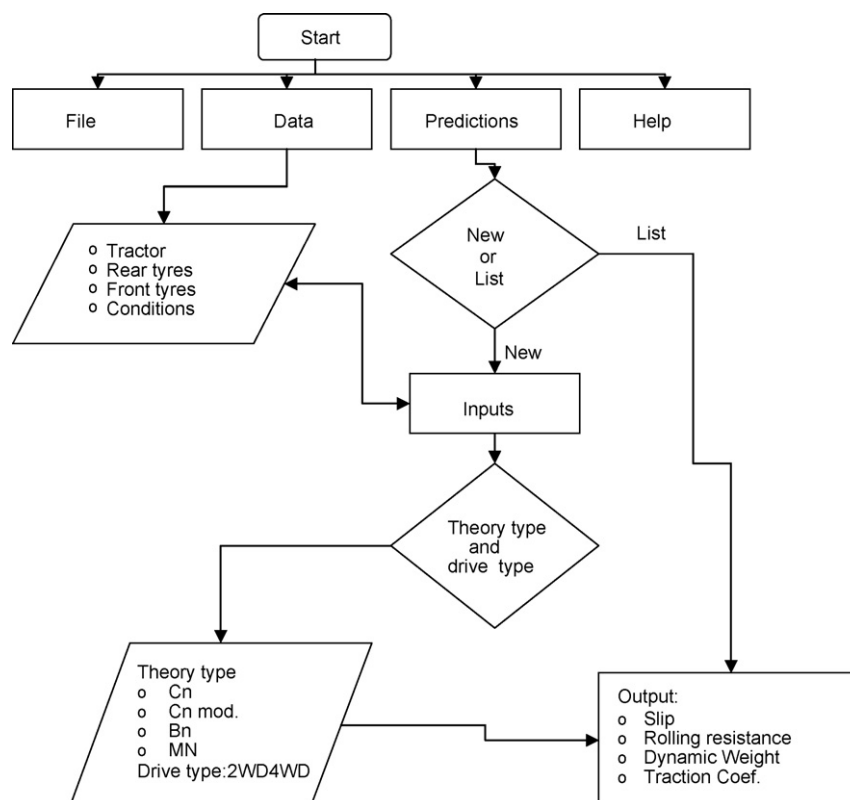


Fig. 3 – Tractor.PT program operation procedure.

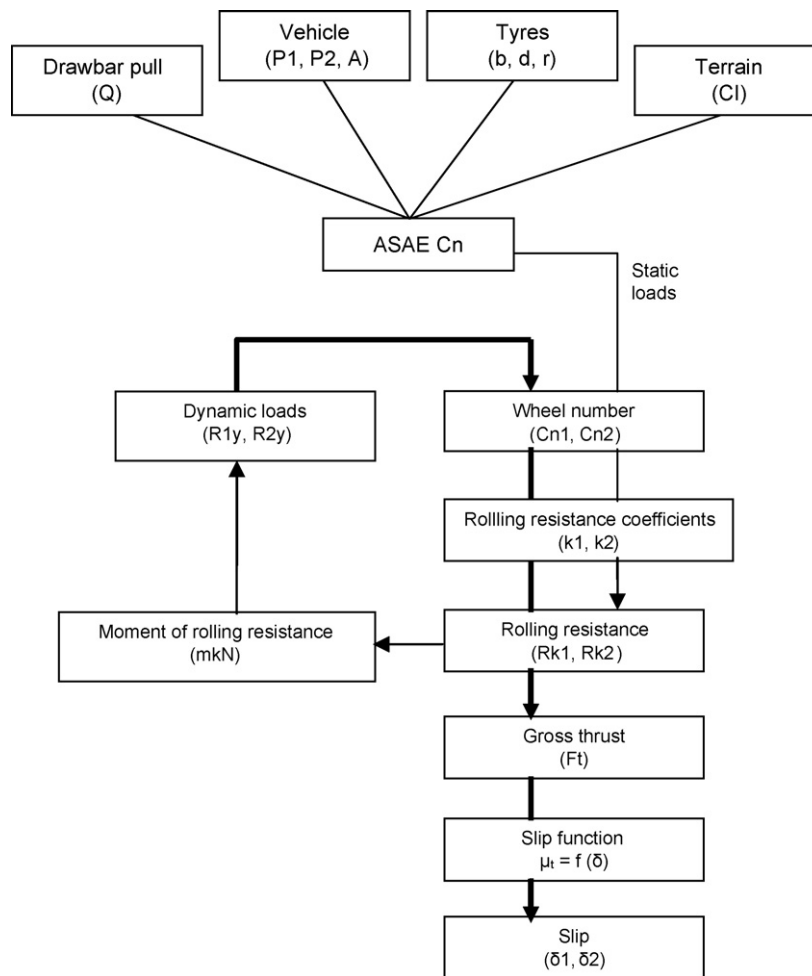


Fig. 4 – Calculation flow chart for ASAE theory, MFWD:4WD.

The image shows a software interface titled "Prediction" for a tractor model. It features a "Prediction" window with a tractor icon and a university logo. The interface is divided into "Inputs" and "Outputs" tabs. The "Outputs" tab is active, displaying "Prediction results" for a tractor labeled "TRACTOR\_P1". The results are organized into four sections: Slip, Rolling Resistance, Dynamic weight, and Thrust. Each section contains numerical values for two parameters, with units specified.

Slip	
$\delta_1$	9,1 %
$\delta_2$	10,4 %

Rolling Resistance		Tractor roll Resist.	
Rk1	1,8 kN	Rk	2,5 kN
Rk2	0,7 kN		

Dynamic weight		Thrust	
R1y	2779,3 kp	Ft	17,4 kN
R2y	1095,7 kp		

At the bottom of the window, there are three buttons: "Accept", "Print", and "Preview".

Fig. 5 – Summary screen showing results obtained.



the hard code in the Visual Basic modules (Linares et al., 2006).

In the other database the user stores the prediction data using the Visual Basic GUI. This database has five tables, conditions, tractor, rear tyres, front tyres and predictions. The GUI is very easy to manage and is perfectly integrated with the Windows utilities and programs. It uses the Newton iteration algorithm to obtain the root of the slip function.

The software covers two- and four-wheel drive tractors working on horizontal terrain with parallel-horizontal drawbar pull. All other conditioning factors are defined by the prediction theories used.

The program flow chart is given in Figs. 2 and 3. The data sheet and prediction menus are accessed from the main menu, to create the databases relating to the tractor, front and rear tyres and test conditions. The user may create, correct, add or remove data sheets from any of the databases.

To predict the performance of a given tractor, the user selects “new prediction” on the “predictions” submenu to display the screen where the respective data, including the choice of drive (two- or four-wheel) and model, are to be entered. The calculation procedure for a 4WD tractor using model Cn is outlined in Fig. 4. Prediction results can be visualized both on a summary screen (Fig. 5) or as a preview (Fig. 6) and exported to a spreadsheet.

## TRACTION PREDICTION IN AGRICULTURAL TRACTORS

Theory

MN MFWD/4WD Tractor

Reference

KUBOTA M1-100-NT-1-ND-4-CON-1-MN-MFWD/4WD

Tractor					
Reference	KUBOTA M1-100				
Model	M1-100 DT E(4WD)				
Static rear axle weight (kp)	p1	2.375	Static front axle weight (kp)	p2	1.500
Total weight (kp)	Pt	3.875	Drawbar height (m)	hq	0,5100
Wheelbase	I	2,4400	Center of Gravity Abscissa (m)	ag	0,9445
Inter axle ratio	RM	1,4162	lead	a	1,0135

TYRES					
FRONT TYRES			REAR TYRES		
Reference	NT-1		Reference	ND-4	
Model	18,4R38		Model	18,4R38	
Maximum Vertical tyre load (kg)	3.000		Maximum Vertical tyre load (kg)	1.700	
section width (m)	b1	0,4670	section width (m)	b2	0,3750
Rim Diameter (in)	d1l1	38	Rim Diameter (in)	d1l2	24
Rim Diameter (m)	d1l1	0,9652	Rim Diameter (m)	d1l2	0,6096
overall tire diameter (m)	d1	1,7420	overall tire diameter (m)	d2	1,2380
static loaded radius (m)	r1c	0,7970	static loaded radius (m)	r2c	0,5580
Tire rolling radius (m)	r1	0,8300	Tire rolling radius (m)	r2	0,5940

WORKING CONDITIONS		
Reference	CON-1	
Drawbar Pull (kp)	1.520	
Cone Index (kPa)	1.043	

CALCULATION WITH STATIC WEIGHT					
Wheel Number	Cn1	72,8361	Wheel Number	Cn2	65,8121
Tyre Deflection	$\Delta 1$	0,0740	Tyre Deflection	$\Delta 2$	0,0610
Modified tyre deflection	$\Delta m1$	0,0293	Modified tyre deflection	$\Delta m2$	0,0269
Mobility Number MN	MN1	17,6380	Mobility Number MN	MN2	16,7274
Coefficient of rolling resistance	k1	0,0654	Coefficient of rolling resistance	k2	0,0663
Rolling resistance (kN)	Rk1	1,5	Rolling resistance (kN)	Rk2	1,0
Tractor rolling resistance (kN)	RKV	2,5			
Moment of rolling resistance (mkN)	MK	2,1			

CALCULATION WITH DYNAMIC WEIGHT					
Dynamic rear axle weight (kp)	R1Y	2.779,3	Dynamic front axle weight (kp)	R2Y	1.095,7
Wheel Number	Cn1	62,2397	Wheel Number	Cn2	90,0998
Tyre Deflection	$\Delta 1$	0,0740	Tyre Deflection	$\Delta 2$	0,0610
Modified tyre deflection	$\Delta m1$	0,0343	Modified tyre deflection	$\Delta m2$	0,0197
Mobility Number MN	MN1	16,3046	Mobility Number MN	MN2	19,5721
Coefficient of rolling resistance	k1	0,0667	Coefficient of rolling resistance	k2	0,0638
Rolling resistance (kN)	Rk1	1,8	Rolling resistance (kN)	Rk2	0,7
Tractor rolling resistance (kN)	RKV	2,5			
Gross thrust (kp)	Ft	1.775,3			
wheel slip (%)	$\delta$	9,1	wheel slip (%)	$\delta 2$	10,4

Fig. 6 – Full prediction results, exportable to Excel spreadsheet.

## 6. Conclusions

A computerized model in Visual Basic has been developed to predict 2WD and 4WD:MFWD tractor performance on farmland. The model is designed for use in education and research. The menus and windows guide the user through a series of fairly easy steps. The interface is intuitive and user-oriented with screens for selecting the type of tractor, tyres and conditions.

The software uses four prediction models that calculate dynamic axle load, soil–vehicle parameters and slip from the drawbar pull.

## REFERENCES

- Al-Hamed, S.-A., Grisso, R.D., Zoz, F.M., Von Bargen, K., 1994. Tractor performance spreadsheet for radial tires. *Comput. Electron. Agric.* 10 (1994), 45–62.
- Al-Hamed, S.A., Al-Janobi, A.A., 2001. A program for predicting tractor performance in Visual C++. *Comput. Electron. Agric.* 3 (2001), 137–149.
- Bekker, M.G., 1969. *Introduction to Terrain-Vehicle System*. The University of Michigan Press.
- Brixius, W.W., Wismer, R.D., 1975. *Traction Prediction Equations for Wheeled vehicles*. John Deere Report No. 109. Project 9008. Technical Center, Deere&Company, Moline, Illinois, 1975.
- Camps, M., Catalán, H., Linares, P., 2000. Medida del deslizamiento en los ensayos de tracción. III Seminario Científico Transmec.
- Camps, M., Catalán, H., Hernández, P., Linares, P., 2000. Influencia del radio de la rueda utilizado en la aplicación del modelo de predicción de tracción de Wismer y Luth. III Encuentro Internacional de Mecanización Agrícola. Facultad de Mecanización Agrícola de la Universidad de Ciego de Ávila (Cuba).
- Camps, M., Catalán, H., Linares, P., 2005. Modelización informática del tractor agrícola. Programa MITRA. Convención Universidad de Granma 2005, Cuba, ISBN 959-16-0357-6.
- Catalán, H., 1996. Análisis del comportamiento en tracción de tractores agrícolas de simple y doble tracción. Comparación entre resultados experimentales y teorías de predicción. Tesis doctoral. UPM, Madrid.
- Catalán, H., Linares, P., 1998. Teorías predictivas de tracción en tractores agrícolas. Comparación con resultados experimentales. Congreso Latinoamericano de Ing. Rural. CLIR'98, Buenos Aires.
- Cervantes, M., 1993. Estudio experimental del sistema suelo-vehículo aplicado a la predicción de tracción de los tractores agrícolas. Tesis doctoral. UPM, Madrid.
- Cervantes, M., Linares, P., Catalán, H., 2000. A new approach to traction prediction model of Wismer y Luth. 14th International Conference, Vicksburg. Int. Soc. Terrain-Veh. Syst..
- Gee-Clough, D., McAllister, M., Pearson, G., Everden, D.W., 1978. The empirical prediction of tractor field performance. *J. Terramech.* 15 (2), 81–94.
- Gee-Clough, D., 1984. Selection of tyres sizes for agricultural vehicles. *J. Agric. Eng. Res.* 25. (3).
- Goering, C.E., Hansen, A.C., 2004. *Engine and Tractor Power*, fourth ed. ASAE, St. Joseph, Mi, USA.
- Grisso, R.D., Zoz, F.M., 2004. Tractor and traction performance—spreadsheet development. ASAE/CSAE Paper Number 041070.
- Hernández, P., 1998. Análisis del patinamiento en tractores de simple tracción a través de las teorías de predicción de tracción de ASAE y su contraste experimental. Tesis doctoral. UPM, Madrid.
- Linares, P., Cervantes, M., Márquez, L., Vázquez, J., 1993. Traction prediction and a comparison with experimental test results. In: 11th Int. Conf. Society Of Terrain-Vehicle System (ISTVS), Lake Tahoe (USA).
- Linares, P., Catalán, H., Mahl, D., La Calle, P., 2005. Teorías Predictivas de ASAE y DEERE, comportamiento frente al peso del tractor. In: Simposio Internacional de Ingeniería Rural, Palencia Junio 2005, ISBN 84-609-6470-1.
- Linares, P., Catalán, H., Méndez, V., 2006. Teoría de la tracción en los tractores agrícolas. Monografía E.T.S.I.A R-413. ISBN:84-7401-196-5.
- Mahl, D., La Calle, P., Catalán, H., Linares, P., 2005. Efecto del lastre en el deslizamiento, según las teorías de predicción y su contraste con resultados experimentales. CADIR 05. ISBN:987-05-0140-0.
- Upadhyaya, S.K., Sime, M., Raghwanishi, N., Adler, B., 1997. Semi-empirical traction prediction equations based on relevant soil parameter. *J. Terramech.* 34 (3), 141–154.
- Wismer, R.D., Luth, H.J., 1972. Off-road traction prediction of wheeled vehicles. ASAE paper no. 72.619.
- Wong, J.Y., 1986. Computer-aided analysis of the effects of design parameters on the performance of tracked vehicle. *J. Terramech.* 23 (2), 95–125.
- Zoz, F.M., Grisso, R.D., 2003. Traction and tractor performance. ASAE Distinguished lecture no. 27.